

## 简介 General Description

CBK 齿轮泵系高压小排量齿轮油泵，由一对高强度齿轮、轴套、泵体、前盖、后盖等主要部件组成，轴向间隙由高精度浮动轴套自动补偿，使得 CBK 齿轮泵具有高的机械效率和容积效率，该泵噪音低、重量功率比小，广泛应用各种交流和直流液压动力单元和中小型液压系统。

用户订货时应注意，CBK 齿轮泵有顺时针、逆时针两种转向及后盖进/前盖出、泵体进/后盖出、后盖进/泵体出、泵体进/泵体出、后盖进/后盖出五种进出油方式。

The CBK gear pump consists of a gear pair supported by two aluminum bearing blocks, a housing, front cover and rear cover. The axial clearance can be automatically compensated by the bearing blocks. The CBK pump features high mechanical and volumetric efficiency, low noise level as well as low weight/power ratio.


Notes: The CBK gear pump has five options of inlet/outlet positions: rear in/front out, side in/rear out, rear in/side out, side in/side out, rear in/rear out. Both CW and CCW direction pumps are available.

## 型谱 Order Code


CBK-F		*	*	*	*	*
20MPa	额定压力 Rated pressure					
0.63~8 mL/r	排量 Displacement					
D	后盖进/后盖出 Rear in/rear out					
C	泵体进/泵体出 Side in/side out					
B	后盖进/泵体出 Rear in/side out					
A	泵体进/后盖出 Side in/rear out					
空白 Omit	后盖进/前盖出 Rear in/front out	进出油位置 Inlet/outlet Position				
		轴端形式 Shaft Optional				
		空白 Omit	扁势 Tang			
		D	花键 Spline			
		旋向 Direction				
		空白 Omit	顺时针 CW			
		F	逆时针 CCW			
		油口形式 Port Configurations				
		空白 Omit	NPT 油口 NPT O-ring boss			
		G	管螺纹 Gas Threaded Ports			

## 外形尺寸图 Outline Dimension


CBK-F\*F Outline Dimension (Rear in/front out)

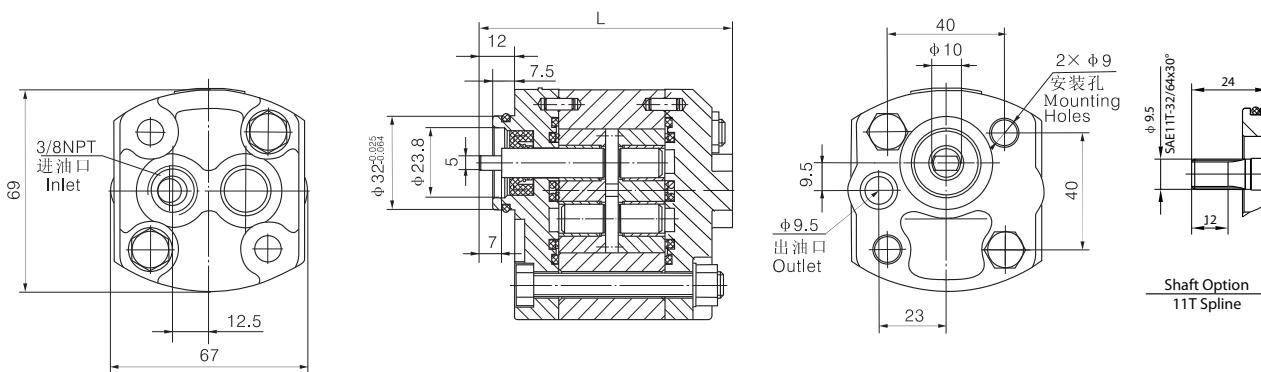


CBK-F\*AF Outline Dimension (Side in/rear out)

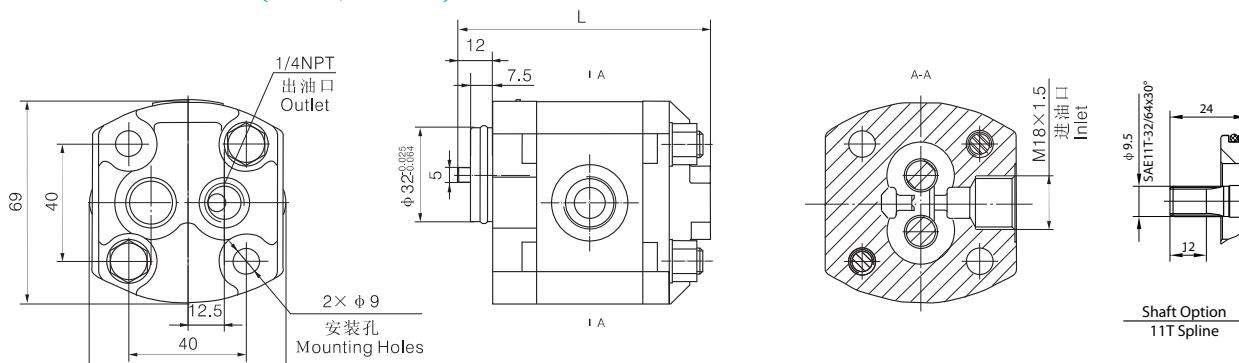



CBK-F\*B Outline Dimension (Rear in/side out)

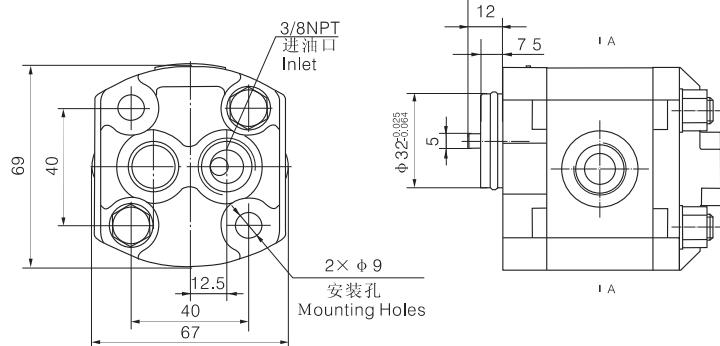



德力液压 Deli®

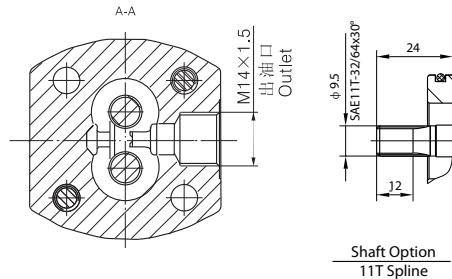

CBK-F\*CF Outline Dimension (Side in/side out)

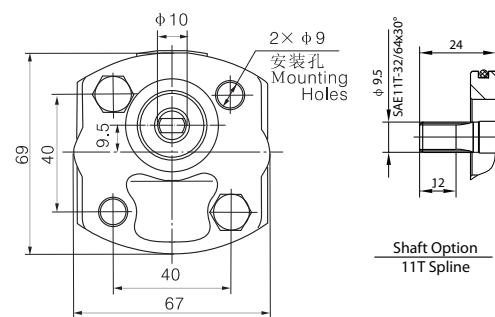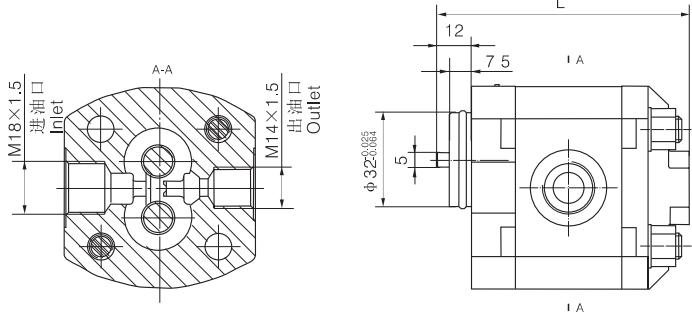

CBK-F\*DF Outline Dimension (Rear in/rear out)

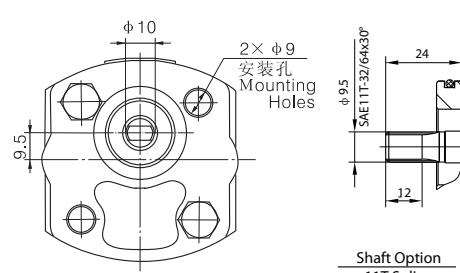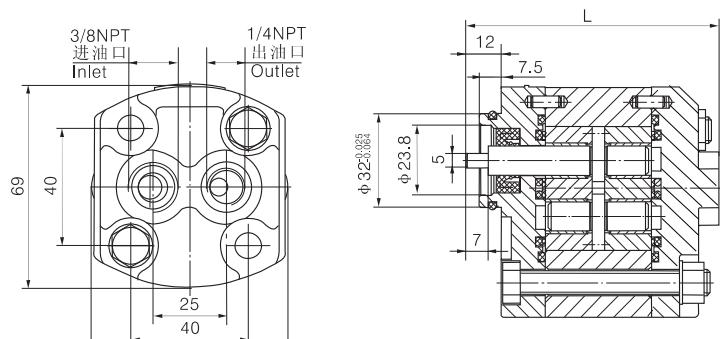

**技术参数** Technical Data

Model 型号	Displacement 排量 mL/r(in³/r)	Pressure pressure (MPa)			Speed (RPM)		L(mm)	Efficiency 容积效率
		P1	P2	P3	Rated 额定	Max 最高		
CBK-F0.63**	0.63 (0.038)	20	25	28	2000	4000	84.5	85%
CBK-F0.8**	0.89 (0.054)						85.5	
CBK-F1.2**	1.27 (0.078)						87	
CBK-F1.5**	1.487 (0.091)						87.8	86%
CBK-F1.6**	1.66 (0.101)						88.5	
CBK-F2.0**	2.05 (0.125)						90	
CBK-F2.1**	2.17 (0.132)						90.5	88%
CBK-F2.5**	2.56 (0.156)						92	
CBK-F2.7**	2.8 (0.171)						93	
CBK-F3.2**	3.32 (0.203)	18	23	26	2000	3600	95	89%
CBK-F3.7**	3.8 (0.232)						97	
CBK-F4.2**	4.3 (0.263)						99	
CBK-F5**	5.1 (0.311)						102	
CBK-F6**	6.03 (0.368)	14	18	23	1500	3000	105.5	90%
CBK-F8**	8.08 (0.493)						113.5	